

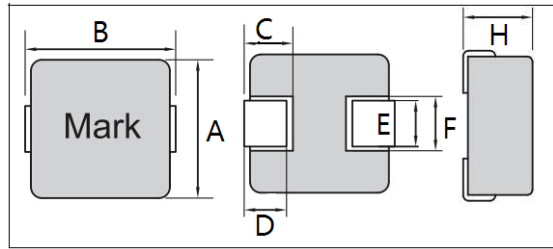


外型及尺寸 Shape and size ( unit: mm )

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0320	3.0	3.4	2.0	0.9	0.6	1.0	1.4	4.2	1.0	1.2	3000PCS/R

电气参数 Electrical parameters

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0320-R22M	0.22	100KHz/1.0V	9.5	12	6	9
ASDC0320-R33M	0.33	100KHz/1.0V	14	17	5	7
ASDC0320-R56M	0.56	100KHz/1.0V	24	30	3.5	5.5
ASDC0320-R68M	0.68	100KHz/1.0V	28	33	3	4.5
ASDC0320-R88M	0.88	100KHz/1.0V	34	41	2.5	4.5
ASDC0320-1R0M	1.0	100KHz/1.0V	42	51	2	3.5
ASDC0320-1R2M	1.2	100KHz/1.0V	46	55	1.5	3.5
ASDC0320-1R5M	1.5	100KHz/1.0V	53	64	1.5	3
ASDC0320-2R2M	2.2	100KHz/1.0V	66	79	1	2.5
ASDC0320-3R3M	3.3	100KHz/1.0V	80	95	1	2

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

\* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.