

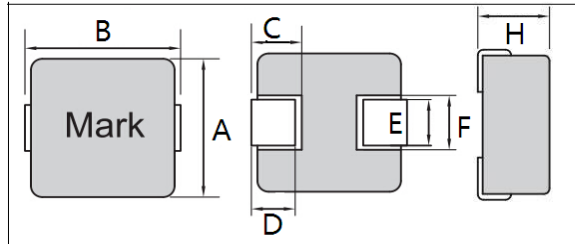


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm) www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0415	4.0	4.3	1.5	1.2	0.8	1.5	2.0	5.2	2.2	2.5	2000PCS/R

电气参数 Electrical parameters www.anruike.com Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0415-R47M	0.47	100KHz/1.0V	20	27	5	9
ASDC0415-1R0M	1.0	100KHz/1.0V	39	50	4	6
ASDC0415-1R5M	1.5	100KHz/1.0V	48	63	4	6
ASDC0415-2R2M	2.2	100KHz/1.0V	67	86	2.5	4
ASDC0415-3R3M	3.3	100KHz/1.0V	116	156	2	3.5

本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com