

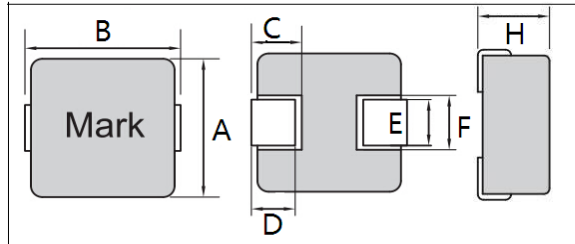


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0515	4.7	5.2	1.5	1.6	1.0	2.0	2.5	7.5	2.5	3.5	2000PCS/R

电气参数 Electrical parameters [Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0515-1R0M	1.0	100KHz/1.0V	20.0	23.0	6.5	9.0
ASDC0515-1R2M	1.2	100KHz/1.0V	29.3	33.7	5.3	8.0
ASDC0515-2R2M	2.2	100KHz/1.0V	58.0	64.0	3.3	6.0
ASDC0515-3R3M	3.3	100KHz/1.0V	65.0	72.0	3.2	5.0
ASDC0515-4R7M	4.7	100KHz/1.0V	95.0	106.0	3.0	4.0
ASDC0515-6R8M	6.8	100KHz/1.0V	120.	130.0	2.5	3.2
ASDC0515-100M	10.0	100KHz/1.0V	153.0	170.0	2.0	3.0
ASDC0515-150M	15.0	100KHz/1.0V	310.0	350.0	1.3	2.3

本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com