

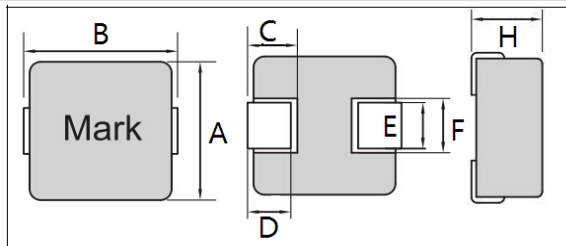


# Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size ( unit: mm )

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0520	4.7	5.2	2.0	1.6	1.0	2.0	2.5	7.5	2.5	3.5	<b>2000PCS/R</b>

电气参数 Electrical parameters

Anruike/安瑞科 [www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0520-R68M	0.68	100KHz/1.0V	15	20	5	10
ASDC0520-1R0M	1.0	100KHz/1.0V	15	21	5	8
ASDC0520-1R2M	1.2	100KHz/1.0V	17	25	5	8
ASDC0520-1R5M	1.5	100KHz/1.0V	20	26	4	6
ASDC0520-2R2M	2.2	100KHz/1.0V	32	42	3.5	6
ASDC0520-3R3M	3.3	100KHz/1.0V	44	58	3.5	5.5
ASDC0520-4R7M	4.7	100KHz/1.0V	68	90	3.2	4.5
ASDC0520-5R6M	5.6	100KHz/1.0V	75	97	3	4
ASDC0520-100M	10.0	100KHz/1.0V	170	221	2	3

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

\* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科電子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: [ark@anruike.com](mailto:ark@anruike.com)