

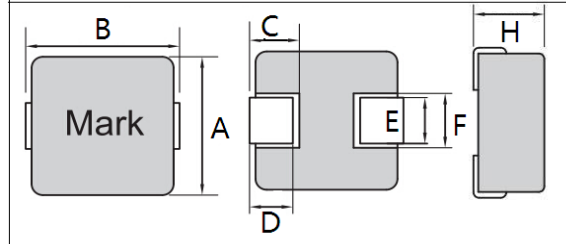


外型及尺寸 Shape and size (unit: mm)

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0550	4.7	5.2	5.0	1.6	1.0	2.0	2.5	7.5	2.5	3.5	1500PCS/R

电气参数 Electrical parameters

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0550-100M	10.0	100KHz/1.0V	80	103	2.5	4.5
ASDC0550-150M	15.0	100KHz/1.0V	140	180	2	4
ASDC0550-220M	22.0	100KHz/1.0V	180	230	1.5	2.5
ASDC0550-330M	33.0	100KHz/1.0V	345	445	1.5	2
ASDC0550-470M	47.0	100KHz/1.0V	404	527	1	2
ASDC0550-560M	56.0	100KHz/1.0V	456	600	0.8	1

本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.