

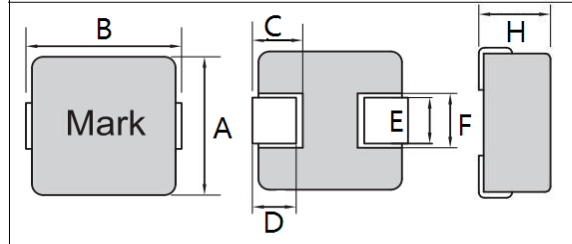


外型及尺寸 Shape and size ( unit: mm )

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC0730	6.6	7.2	3.0	2.0	1.6	3.0	3.6	8.4	3.7	3.5	<b>1000PCS/R</b>

电气参数 Electrical parameters

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC0730-R10M	0.1	100KHz/1.0V	1.5	1.7	32.5	60
ASDC0730-R22M	0.22	100KHz/1.0V	2.3	3.0	23	40
ASDC0730-R33M	0.33	100KHz/1.0V	3.2	3.9	20	30
ASDC0730-R47M	0.47	100KHz/1.0V	3.6	4.7	17.5	26
ASDC0730-R56M	0.56	100KHz/1.0V	4.3	5.7	16.5	25.5
ASDC0730-R68M	0.68	100KHz/1.0V	5.7	7.4	15.5	25
ASDC0730-R82M	0.82	100KHz/1.0V	6.7	8	13	24
ASDC0730-1R0M	1.0	100KHz/1.0V	9	10	11	22
ASDC0730-1R5M	1.5	100KHz/1.0V	10.5	13.7	9	18
ASDC0730-2R2M	2.2	100KHz/1.0V	12.5	19	8	14
ASDC0730-3R3M	3.3	100KHz/1.0V	20	30	6	10
ASDC0730-4R7M	4.7	100KHz/1.0V	28	40	5.5	10
ASDC0730-5R6M	5.6	100KHz/1.0V	34	45	5.5	8
ASDC0730-6R8M	6.8	100KHz/1.0V	40	51	4.5	8
ASDC0730-8R2M	8.2	100KHz/1.0V	54	68	4.5	6
ASDC0730-100M	10.0	100KHz/1.0V	60	102	3	6

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

\* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.