

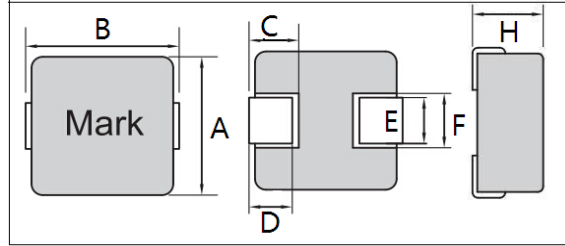


外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC1040	10.0	11.5	4.0	2.5	2.0	3.0	5.0	13.6	5.4	4.1	500PCS/R

电气参数 Electrical parameters [Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC1040-R22M	0.22	100KHz/1.0V	0.9	1.0	35.0	60.0
ASDC1040-R39M	0.39	100KHz/1.0V	1.1	1.2	31.0	45.0
ASDC1040-R47M	0.47	100KHz/1.0V	1.5	1.68	30.0	40.0
ASDC1040-1R0M	1.0	100KHz/1.0V	3.0	3.3	18.0	28.0
ASDC1040-1R5M	1.5	100KHz/1.0V	3.8	4.2	16.0	32.0
ASDC1040-2R2M	2.2	100KHz/1.0V	6.0	7.0	12.0	18.0
ASDC1040-3R3M	3.3	100KHz/1.0V	10.8	11.8	10.0	16.0
ASDC1040-4R7M	4.7	100KHz/1.0V	17.0	20.0	8.5	15.0
ASDC1040-5R6M	5.6	100KHz/1.0V	20.0	23.0	8.0	14.0
ASDC1040-6R8M	6.8	100KHz/1.0V	22.5	25.0	7.0	12.0
ASDC1040-8R2M	8.2	100KHz/1.0V	25.0	27.0	6.5	9.0
ASDC1040-100M	10.0	100KHz/1.0V	27.0	30.0	6.3	8.5
ASDC1040-150M	15.0	100KHz/1.0V	40.0	45.0	6.0	7.0
ASDC1040-220M	22.0	100KHz/1.0V	60.0	66.0	5.0	5.5
ASDC1040-330M	33.0	100KHz/1.0V	85.0	92.0	4.4	5.0
ASDC1040-470M	47.0	100KHz/1.0V	130.0	145.0	3.3	3.5
ASDC1040-680M	68.0	100KHz/1.0V	178.0	195.0	2.3	3.0

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.