

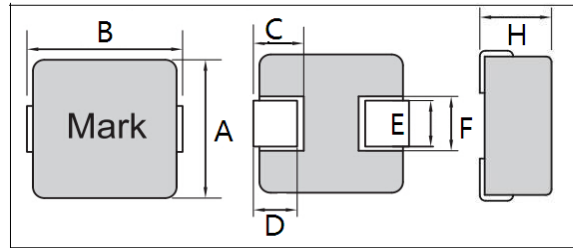


外型及尺寸 Shape and size (unit: mm)

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC1050	10.0	11.5	5.0	2.5	2.0	3.0	5.0	13.6	5.4	4.1	500PCS/R

电气参数 Electrical parameters

[Anruike/安瑞科 www.anruike.com](http://www.anruike.com) Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC1050-5R2M	5.2	100KHZ/0.25V	16	21	5.5	10
ASDC1050-100M	10	100KHZ/0.25V	20	31	4.6	8
ASDC1050-150M	15	100KHZ/0.25V	39	52	3.6	6
ASDC1050-220M	22	100KHZ/0.25V	73	92	4	6
ASDC1050-330M	33	100KHZ/0.25V	107	120	3	5
ASDC1050-470M	47	100KHZ/0.25V	160	210	3	4
ASDC1050-680M	68	100KHZ/0.25V	240	300	3	4
ASDC1050-101M	100	100KHZ/0.25V	320	400	2	3

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com