

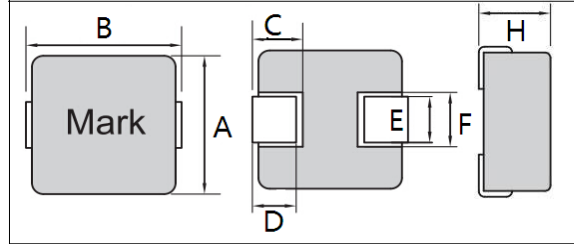


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC1235	12.6	13.45	3.5	2.5	2.0	4.0	6.0	14.5	8.0	5.0	500PCS/R

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel: 0755-29805463

产品型号 Part NO	电感量 Inductance L (uH) ±20%	测试条件 Test Condition	直流电阻 (mΩ) DCResistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC1235-R22M	0.22	100KHz/1.0V	1.1	1.3	38.0	65.0
ASDC1235-R33M	0.33	100KHz/1.0V	1.3	1.5	36.5	62.0
ASDC1235-R39M	0.39	100KHz/1.0V	1.5	1.8	34.0	60.0
ASDC1235-R47M	0.47	100KHz/1.0V	1.7	2.0	32.0	55.0
ASDC1235-R56M	0.56	100KHz/1.0V	1.8	2.2	29.0	51.0
ASDC1235-R60M	0.60	100KHz/1.0V	1.8	2.2	29.0	51.0
ASDC1235-R62M	0.62	100KHz/1.0V	1.8	2.2	29.0	51.0
ASDC1235-R68M	0.68	100KHz/1.0V	2.3	2.5	28.0	49.0
ASDC1235-R82M	0.82	100KHz/1.0V	2.6	3.0	25.0	44.0
ASDC1235-1R0M	1.0	100KHz/1.0V	3.3	3.5	24.0	40.0
ASDC1235-1R5M	1.5	100KHz/1.0V	5.1	5.5	19.0	35.0
ASDC1235-2R2M	2.2	100KHz/1.0V	7.2	8.0	16.0	29.0
ASDC1235-3R3M	3.3	100KHz/1.0V	10.0	12.0	12.0	27.0
ASDC1235-4R7M	4.7	100KHz/1.0V	16.0	18.0	9.0	22.0

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科電子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com