

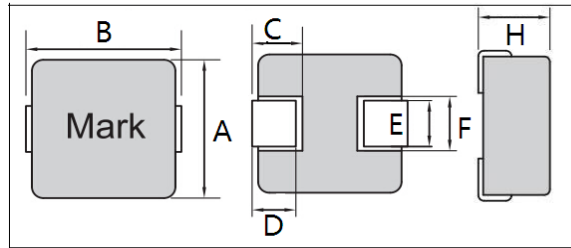


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC1250	12.6	13.45	5.0	2.5	2.0	4.0	6.0	14.5	8.0	5.0	500PCS/R

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号 Part NO	电感量 Inductance	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC1250-R15M	0.15	100KHz/1.0V	0.55	0.7	45.0	110.0
ASDC1250-R47M	0.47	100KHz/1.0V	1.1	1.3	38.0	65.0
ASDC125.-R56M	0.56	100KHz/1.0V	1.2	1.5	36.0	55.0
ASDC1250-R68M	0.68	100KHz/1.0V	1.5	1.7	34.0	54.0
ASDC1250-R82M	0.82	100KHz/1.0V	1.8	2.1	31.0	53.0
ASDC1250-1R0M	1.0	100KHz/1.0V	2.1	2.5	29.0	50.0
ASDC1250-1R2M	1.2	100KHz/1.0V	2.6	3.0	25.0	49.0
ASDC1250-1R5M	1.5	100KHz/1.0V	3.4	4.1	23.0	48.0
ASDC1250-2R2M	2.2	100KHz/1.0V	4.6	5.5	20.0	32.0
ASDC1250-3R3M	3.3	100KHz/1.0V	7.7	9.2	15.0	32.0
ASDC1250-4R7M	4.7	100KHz/1.0V	12.8	15.0	12.0	27.0
ASDC1250-6R3M	6.3	100KHz/1.0V	15.4	18.5	11.0	21.0
ASDC1250-6R8M	6.8	100KHz/1.0V	15.4	18.5	11.0	21.0

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, n said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com