

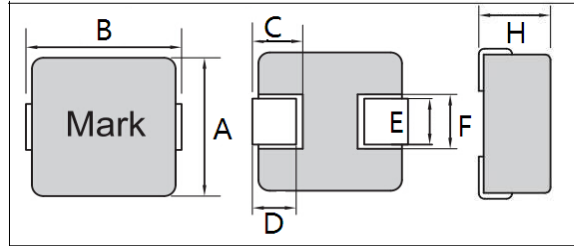


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



产品型号	A	B (Max)	H (Max)	C	D	E	F	N	J	G	unit package
ASDC1265	12.6	13.45	6.5	2.5	2.0	4.0	6.0	14.5	8.0	5.0	500PCS/R

以上为常用产品，超出以上规格或特殊要求请另行联系我司

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel:0755-29805463

产品型号 Part NO	电感量 Inductance	测试条件 Test Condition	直流电阻 (mΩ) DC Resistance		温升电流 Heat Rated Current (A)Max	饱和电流 Saturation Current (A) (Max)
			Typical	Max		
ASDC1265-R22M	0.22	100KHz/1.0V	0.39	0.7	38	70
ASDC1265-R33M	0.33	100KHz/1.0V	0.71	0.9	35	70
ASDC1265-R36M	0.36	100KHz/1.0V	0.71	0.9	32	32
ASDC1265-R80M	0.80	100KHz/1.0V	0.86	1.2	20	26
ASDC1265-2R2M	2.20	100KHz/1.0V	4.7	6.1	17	25
ASDC1265-3R3M	3.30	100KHz/1.0V	5.9	7.1	15	24
ASDC1265-5R6M	5.60	100KHz/1.0V	9.0	12	12	17
ASDC1265-7R8M	7.80	100KHz/1.0V	13.5	17	10	12
ASDC1265-100M	10.0	100KHz/1.0V	15	18	8	8
ASDC1265-220M	22.0	100KHz/1.0V	33.5	36	5	6
ASDC1265-330M	33.0	100KHz/1.0V	48	57	4	5
ASDC1265-470M	47.0	100KHz/1.0V	57.5	75	4	4.5
ASDC1265-560M	56.0	100KHz/1.0V	74	95	3	6
ASDC1265-680M	68.0	100KHz/1.0V	113	148	3	4
ASDC1265-101M	100	100KHz/1.0V	240	310	2.5	4

本页面未能录入全部或最新的参数，仅供参考，请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%，M 表示电感值的公差为±20%，N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com