


Anruike 安瑞科/SMD POWER INDUCTORS **CD106** SERIES

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

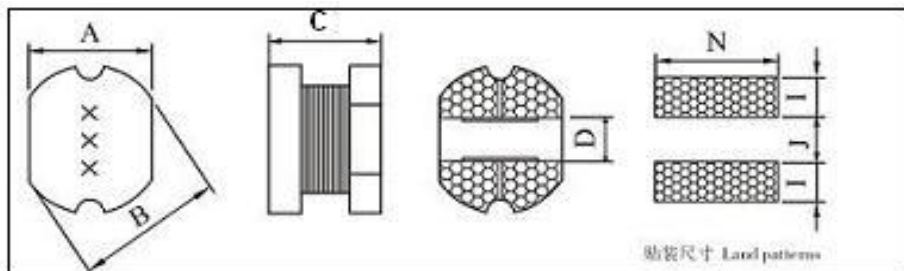

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	l	最小包装数量
CD106	9.0	10.0	6.5	2.9	9.5	4.5	2.5	1000PCS/卷

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD106-8R6M	8.6	±20	100KHz/0.25V	0.025	9.6
CD106-100K	10	±10	100KHz/0.25V	0.03	8.5
CD106-120K	12	±10	100KHz/0.25V	0.040	7.8
CD106-150K	15	±10	100KHz/0.25V	0.043	7.1
CD106-180K	18	±10	100KHz/0.25V	0.045	6.5
CD106-220K	22	±10	100KHz/0.25V	0.05	6.0
CD106-270K	27	±10	100KHz/0.25V	0.060	4.42
CD106-330K	33	±10	100KHz/0.25V	0.063	4.30
CD106-390K	39	±10	100KHz/0.25V	0.070	3.98
CD106-470K	47	±10	100KHz/0.25V	0.1	3.9
CD106-560K	56	±10	100KHz/0.25V	0.10	3.55
CD106-680K	68	±10	100KHz/0.25V	0.13	3.3
CD106-820K	82	±10	100KHz/0.25V	0.15	2.78
CD106-101K	100	±10	100KHz/0.25V	0.19	2.7
CD106-121K	120	±10	100KHz/0.25V	0.26	2.00
CD106-151K	150	±10	100KHz/0.25V	0.32	1.86
CD106-181K	180	±10	100KHz/0.25V	0.47	1.79
CD106-221K	220	±10	100KHz/0.25V	0.56	1.73
CD106-271K	270	±10	100KHz/0.25V	0.77	1.63
CD106-331K	330	±10	100KHz/0.25V	0.84	1.57
CD106-391K	390	±10	100KHz/0.25V	1.07	1.53
CD106-471K	470	±10	100KHz/0.25V	1.23	1.46
CD106-561K	560	±10	100KHz/0.25V	1.51	1.36
CD106-681K	680	±10	100KHz/0.25V	1.89	1.00
CD106-821K	820	±10	100KHz/0.25V	2.00	0.86
CD106-102K	1000	±10	100KHz/0.25V	2.50	0.72

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818