
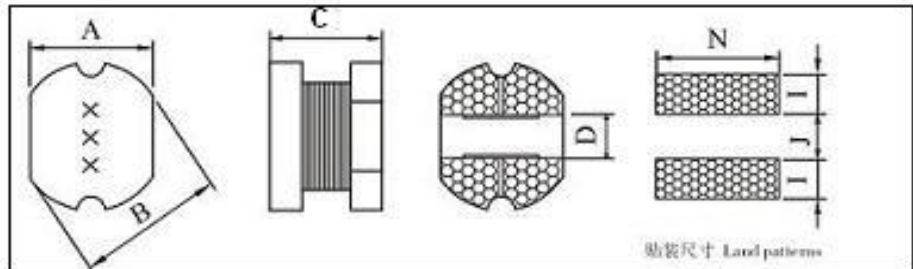


Anruike 安瑞科 / SMD POWER INDUCTORS **CD42** SERIES

外型及尺寸 Shape and size (unit: mm)



产品型号	A±0.3	B±0.3	C±0.3	D	N	J	I	最小包装数量
CD42	4.0	4.5	2.0	1.2	4.5	2.0	1.0	2000PCS/盘

电气参数 Electrical parameters

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD42-2R2M	2.2	±20	100KHz/0.25V	0.045	3.30
CD42-2R7M	2.7	±20	100KHz/0.25V	0.050	2.90
CD42-3R3M	3.3	±20	100KHz/0.25V	0.056	2.70
CD42-3R9M	3.9	±20	100KHz/0.25V	0.075	2.30
CD42-4R7M	4.7	±20	100KHz/0.25V	0.09	2.10
CD42-5R6M	5.6	±20	100KHz/0.25V	0.10	1.90
CD42-6R8M	6.8	±20	100KHz/0.25V	0.12	1.75
CD42-7R4M	7.4	±20	100KHz/0.25V	0.13	1.42
CD42-8R2M	8.2	±20	100KHz/0.25V	0.15	1.30
CD42-100K	10	±10	100KHz/0.25V	0.16	1.40
CD42-120K	12	±10	100KHz/0.25V	0.26	1.70
CD42-150K	15	±10	100KHz/0.25V	0.30	1.65
CD42-180K	18	±10	100KHz/0.25V	0.35	1.60
CD42-220K	22	±10	100KHz/0.25V	0.42	1.10
CD42-270K	27	±10	100KHz/0.25V	0.47	1.00
CD42-330K	33	±10	100KHz/0.25V	0.50	0.92
CD42-390K	39	±10	100KHz/0.25V	0.60	0.80
CD42-470K	47	±10	100KHz/0.25V	0.70	0.70
CD42-560K	56	±10	100KHz/0.25V	0.78	0.66
CD42-680K	68	±10	100KHz/0.25V	0.85	0.60
CD42-820K	82	±10	100KHz/0.25V	1.15	0.53
CD42-101K	100	±10	100KHz/0.25V	1.40	0.45
CD42-121K	120	±10	100KHz/0.25V	1.60	0.25
CD42-151K	150	±10	100KHz/0.25V	2.20	0.15

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818