


Anruike 安瑞科/SMD POWER INDUCTORS CD53 SERIES

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

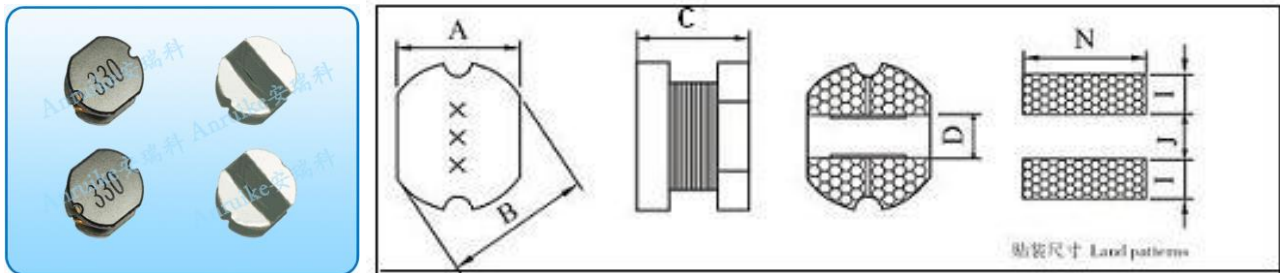

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	l	最小包装数量
CD53	5.2	5.8	3.2	1.6	5.5	2.5	1.2	2000PCS/卷

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD53-3R3M	3.3	±20	100KHz/0.25V	0.033	5.9
CD53-3R9M	3.9	±20	100KHz/0.25V	0.035	4.60
CD53-4R7M	4.7	±20	100KHz/0.25V	0.05	4.7
CD53-5R6M	5.6	±20	100KHz/0.25V	0.06	4.40
CD53-6R8M	6.8	±20	100KHz/0.25V	0.07	4.20
CD53-8R2K	8.2	±10	100KHz/0.25V	0.08	4.00
CD53-100K	10	±10	100KHz/0.25V	0.095	3.10
CD53-120K	12	±10	100KHz/0.25V	0.10	3.75
CD53-150K	15	±10	100KHz/0.25V	0.12	3.70
CD53-180K	18	±10	100KHz/0.25V	0.14	2.60
CD53-220K	22	±10	100KHz/0.25V	0.17	2.20
CD53-270K	27	±10	100KHz/0.25V	0.21	1.75
CD53-330K	33	±10	100KHz/0.25V	0.25	1.62
CD53-390K	39	±10	100KHz/0.25V	0.30	1.60
CD53-470K	47	±10	100KHz/0.25V	0.38	1.50
CD53-560K	56	±10	100KHz/0.25V	0.40	1.40
CD53-680K	68	±10	100KHz/0.25V	0.50	1.30
CD53-820K	82	±10	100KHz/0.25V	0.70	1.10
CD53-101K	100	±10	100KHz/0.25V	0.76	1.00
CD53-221K	220	±10	100KHz/0.25V	1.50	0.58
CD53-271K	270	±10	100KHz/0.25V	2.00	0.55
CD53-331K	330	±10	100KHz/0.25V	2.20	0.58
CD53-391K	390	±10	100KHz/0.25V	2.50	0.56
CD53-471K	470	±10	100KHz/0.25V	3.20	0.50

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818