


Anruike 安瑞科/SMD POWER INDUCTORS **CD54** SERIES

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

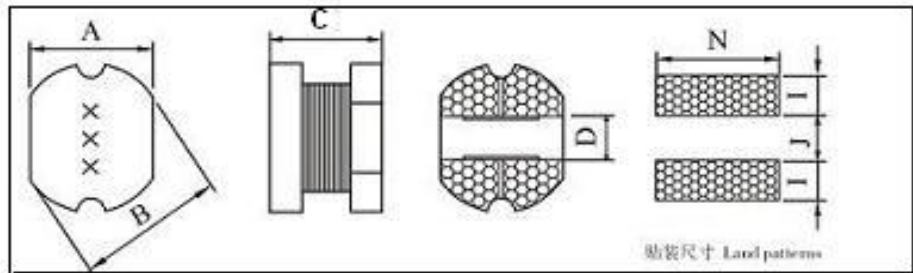

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	l	最小包装数量
CD54	5.2	5.8	4.5	1.3	5.5	2.5	1.2	1500PCS/卷

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号	电感量(uH)	公差(%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD54-1R0N	1.0	±30	100KHz/0.25V	0.013	7.0
CD54-2R2N	2.2	±30	100KHz/0.25V	0.021	5.3
CD54-3R3M	3.3	±20	100KHz/0.25V	0.019	4.30
CD54-6R8M	6.8	±20	100KHz/0.25V	0.042	2.80
CD54-100K	10	±10	100KHz/0.25V	0.055	2.50
CD54-120K	12	±10	100KHz/0.25V	0.08	2.00
CD54-150K	15	±10	100KHz/0.25V	0.085	1.80
CD54-180K	18	±10	100KHz/0.25V	0.09	1.75
CD54-220K	22	±10	100KHz/0.25V	0.10	1.65
CD54-270K	27	±10	100KHz/0.25V	0.156	1.55
CD54-330K	33	±10	100KHz/0.25V	0.178	1.30
CD54-390K	39	±10	100KHz/0.25V	0.190	1.21
CD54-470K	47	±10	100KHz/0.25V	0.209	1.15
CD54-560K	56	±10	100KHz/0.25V	0.320	1.00
CD54-680K	68	±10	100KHz/0.25V	0.385	0.95
CD54-820K	82	±10	100KHz/0.25V	0.400	0.90
CD54-101K	100	±10	100KHz/0.25V	0.415	0.80
CD54-121K	120	±10	100KHz/0.25V	0.630	0.68
CD54-151K	150	±10	100KHz/0.25V	0.800	0.60
CD54-181K	180	±10	100KHz/0.25V	0.90	0.58
CD54-221K	220	±10	100KHz/0.25V	0.95	0.56
CD54-271K	270	±10	100KHz/0.25V	1.45	0.52
CD54-331K	330	±10	100KHz/0.25V	1.60	0.46
CD54-391K	390	±10	100KHz/0.25V	1.85	0.43
CD54-471K	470	±10	100KHz/0.25V	2.00	0.38
CD54-561K	560	±10	100KHz/0.25V	2.15	0.28
CD54-681K	680	±10	100KHz/0.25V	2.20	0.25
CD54-821K	820	±10	100KHz/0.25V	2.43	0.20

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818