


Anruike 安瑞科/SMD POWER INDUCTORS CD78 SERIES

外型及尺寸 Shape and size (unit: mm) [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

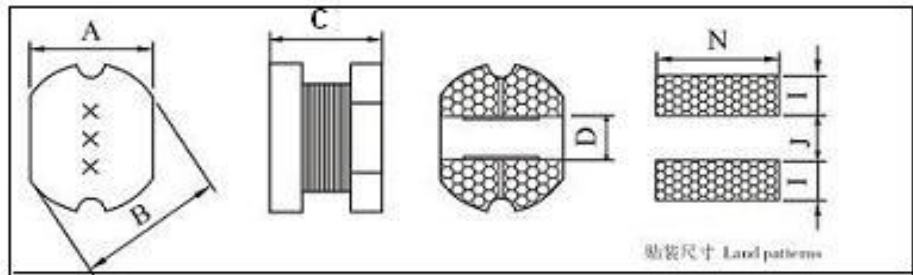

产品型号	A±0.3	B±0.3	C±0.3	D	N	J	l	最小包装数量
CD78	7.0	7.8	8.0	2.1	7.5	3.5	1.5	600PCS/R

电气参数 Electrical parameters [Anruike/安瑞科](http://www.anruike.com) www.anruike.com Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CD78-4R7M	4.7	±20	100KHz/0.25V	0.015	8.50
CD78-100K	10	±10	100KHz/0.25V	0.039	7.50
CD78-150K	15	±10	100KHz/0.25V	0.042	6.0
CD78-180K	18	±10	100KHz/0.25V	0.05	5.5
CD78-220K	22	±10	100KHz/0.25V	0.059	5.0
CD78-270K	27	±10	100KHz/0.25V	0.071	4.5
CD78-330K	33	±10	100KHz/0.25V	0.095	4.30
CD78-390K	39	±10	100KHz/0.25V	0.090	3.68
CD78-470K	47	±10	100KHz/0.25V	0.100	3.50
CD78-560K	56	±10	100KHz/0.25V	0.134	3.0
CD78-680K	68	±10	100KHz/0.25V	0.182	2.8
CD78-820K	82	±10	100KHz/0.25V	0.201	2.5
CD78-101K	100	±10	100KHz/0.25V	0.25	2.4
CD78-121K	120	±10	100KHz/0.25V	0.263	1.80
CD78-151K	150	±10	100KHz/0.25V	0.305	1.78
CD78-181K	180	±10	100KHz/0.25V	0.353	1.75
CD78-221K	220	±10	100KHz/0.25V	0.59	1.65
CD78-271K	270	±10	100KHz/0.25V	0.750	1.45
CD78-331K	330	±10	100KHz/0.25V	0.93	1.35
CD78-391K	390	±10	100KHz/0.25V	1.120	1.2
CD78-471K	470	±10	100KHz/0.25V	1.30	1.1
CD78-561K	560	±10	100KHz/0.25V	1.350	0.88
CD78-681K	680	±10	100KHz/0.25V	1.435	0.75
CD78-821K	820	±10	100KHz/0.25V	1.850	0.63
CD78-102K	1000	±10	100KHz/0.25V	2.000	0.55

以上参数仅供参考, 精准参数以样品为准。本页面未能全部录入, 需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商 Tel:0755-29805463 27994543 FAX:0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818