
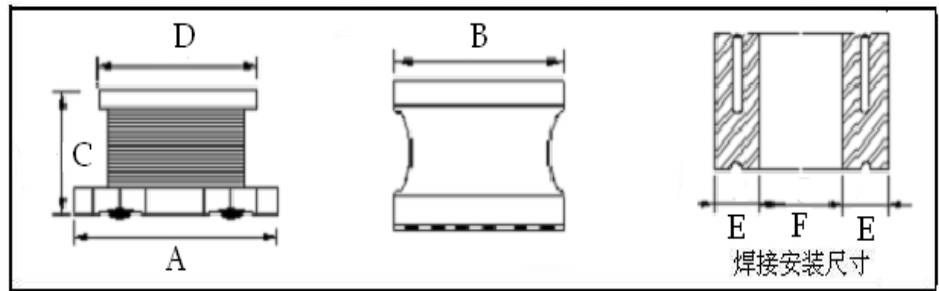


Anruike 安瑞科 / SMDPOWERINDUCTORS CDE322520 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A(±0.3)	B(±0.2)	C(±0.2)	D	E	F	载带盘装
CDE322520	3.2	2.5	2.0	2.5	0.9	1.3	2000PCS/R

电气性能 Electrical properties

Anruike/安瑞科

www.anruike.com

Tel:0755-29805463

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDE322520-1R0M	1.0	±20	100KHz/0.25V	0.05	3.44
CDE322520-2R2M	2.2	±20	100KHz/0.25V	0.06	2.37
CDE322520-2R7M	2.7	±20	100KHz/0.25V	0.09	2.32
CDE322520-3R3M	3.3	±20	100KHz/0.25V	0.10	1.30
CDE322520-4R7M	4.7	±20	100KHz/0.25V	0.21	1.27
CDE322520-5R6M	5.6	±20	100KHz/0.25V	0.23	1.25
CDE322520-6R8M	6.8	±20	100KHz/0.25V	0.25	1.24
CDE322520-8R2M	8.2	±20	100KHz/0.25V	0.30	1.20
CDE322520-100K	10	±10	100KHz/0.25V	0.36	1.10
CDE322520-150K	15	±10	100KHz/0.25V	0.45	0.85
CDE322520-180K	18	±10	100KHz/0.25V	0.55	0.80
CDE322520-220K	22	±10	100KHz/0.25V	0.85	0.75
CDE322520-270K	27	±10	100KHz/0.25V	0.92	0.63
CDE322520-330K	33	±10	100KHz/0.25V	1.10	0.56
CDE322520-390K	39	±10	100KHz/0.25V	1.30	0.49
CDE322520-470K	47	±10	100KHz/0.25V	1.52	0.45
CDE322520-560K	56	±10	100KHz/0.25V	3.54	0.38
CDE322520-680K	68	±10	100KHz/0.25V	4.5	0.34
CDE322520-820K	82	±10	100KHz/0.25V	6.2	0.30
CDE322520-101K	100	±10	100KHz/0.25V	6.7	0.25
CDE322520-121K	120	±10	100KHz/0.25V	8.8	0.26
CDE322520-151K	150	±10	100KHz/0.25V	9.3	0.28
CDE322520-181K	180	±10	100KHz/0.25V	9.6	0.30
CDE322520-331K	220	±10	100KHz/0.25V	12.8	0.19

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商. Tel:0755-29805463 27994543 FAX:0755-29805221

网址:<http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818