
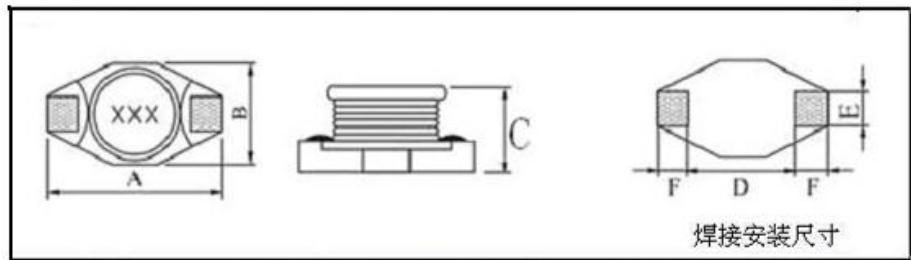


# Anruike 安瑞科/SMD POWER INDUCTORS CDF1608 SERIES

外型及尺寸 (单位: mm) Shape and size ( unit: mm )

Anruike/安瑞科



产品型号	A (Max)	B (Max)	C (Max)	D	E	F	载带盘装
CDF1608	6.60	4.45	2.92	4.32	1.27	1.02	2500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 ( $\mu\text{H}$ )	公差 (%)	测试频率	直流电阻 RDC ( $\Omega$ ) (Max)	额定电流 IDC (A) (Max)
CDF1608-3R3M	3.3	$\pm 20$	100KHz/0.25V	0.08	2.00
CDF1608-3R9M	3.9	$\pm 20$	100KHz/0.25V	0.09	1.80
CDF1608-4R7M	4.7	$\pm 20$	100KHz/0.25V	0.10	1.50
CDF1608-8R2M	8.2	$\pm 20$	100KHz/0.25V	0.15	1.17
CDF1608-100M	10	$\pm 20$	100KHz/0.25V	0.16	1.10
CDF1608-120M	12	$\pm 20$	100KHz/0.25V	0.19	0.95
CDF1608-150M	15	$\pm 20$	100KHz/0.25V	0.23	0.90
CDF1608-180M	18	$\pm 20$	100KHz/0.25V	0.30	0.81
CDF1608-220M	22	$\pm 20$	100KHz/0.25V	0.37	0.70
CDF1608-270M	27	$\pm 20$	100KHz/0.25V	0.42	0.65
CDF1608-330M	33	$\pm 20$	100KHz/0.25V	0.51	0.58
CDF1608-390M	39	$\pm 20$	100KHz/0.25V	0.57	0.54
CDF1608-470M	47	$\pm 20$	100KHz/0.25V	0.64	0.50
CDF1608-820M	82	$\pm 20$	100KHz/0.25V	0.96	0.36
CDF1608-101K	100	$\pm 10$	100KHz/0.25V	1.27	0.31
CDF1608-121K	120	$\pm 10$	100KHz/0.25V	1.47	0.29
CDF1608-151K	150	$\pm 10$	100KHz/0.25V	2.00	0.27
CDF1608-180K	180	$\pm 10$	100KHz/0.25V	2.22	0.25
CDF1608-221K	220	$\pm 10$	100KHz/0.25V	3.11	0.22
CDF1608-271K	270	$\pm 10$	100KHz/0.25V	3.40	0.20
CDF1608-331K	330	$\pm 10$	100KHz/0.25V	3.80	0.18
CDF1608-391K	390	$\pm 10$	100KHz/0.25V	4.00	0.17
CDF1608-471K	470	$\pm 10$	100KHz/0.25V	6.20	0.16
CDF1608-561K	560	$\pm 10$	100KHz/0.25V	7.20	0.15
CDF1608-681K	680	$\pm 10$	100KHz/0.25V	9.20	0.14
CDF1608-102K	1000	$\pm 10$	100KHz/0.25V	13.80	0.10

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: [anruike@anruike.com](mailto:anruike@anruike.com) QQ: 1193940818