
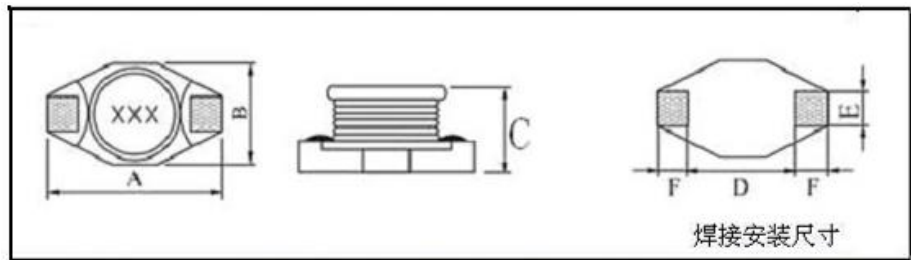


Anruike 安瑞科/SMD POWER INDUCTORS CDF3310 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科



产品型号	A (Max)	B (Max)	C (Max)	D	E	F	载带盘装
CDF3310	12.95	9.40	3.50	7.62	2.54	2.54	1500PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDF3310-100M	10	±20	100KHz/0.25V	0.11	2.40
CDF3310-120M	12	±20	100KHz/0.25V	0.13	2.20
CDF3310-150M	15	±20	100KHz/0.25V	0.15	2.00
CDF3310-180M	18	±20	100KHz/0.25V	0.18	1.80
CDF3310-220M	22	±20	100KHz/0.25V	0.23	1.60
CDF3310-270M	27	±20	100KHz/0.25V	0.26	1.50
CDF3310-330M	33	±20	100KHz/0.25V	0.30	1.40
CDF3310-390M	39	±20	100KHz/0.25V	0.35	1.30
CDF3310-470M	47	±20	100KHz/0.25V	0.39	1.00
CDF3310-560M	56	±20	100KHz/0.25V	0.45	0.95
CDF3310-680M	68	±20	100KHz/0.25V	0.66	0.90
CDF3310-820M	82	±20	100KHz/0.25V	0.76	0.80
CDF3310-101K	100	±10	100KHz/0.25V	0.84	0.70
CDF3310-121K	120	±10	100KHz/0.25V	0.94	0.65
CDF3310-151K	150	±10	100KHz/0.25V	1.20	0.60
CDF3310-181K	180	±10	100KHz/0.25V	1.40	0.55
CDF3310-221K	220	±10	100KHz/0.25V	1.90	0.50
CDF3310-271K	270	±10	100KHz/0.25V	2.10	0.45
CDF3310-331K	330	±10	100KHz/0.25V	2.70	0.40
CDF3310-391K	390	±10	100KHz/0.25V	3.00	0.35
CDF3310-471K	470	±10	100KHz/0.25V	4.00	0.30
CDF3310-561K	560	±10	100KHz/0.25V	4.60	0.25
CDF3310-681K	680	±10	100KHz/0.25V	5.30	0.20
CDF3310-821K	820	±10	100KHz/0.25V	6.30	0.15
CDF3310-102K	1000	±10	100KHz/0.25V	8.40	0.10
CDF3310-122K	1200	±10	100KHz/0.25V	9.00	0.08

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818