


Anruike 安瑞科/SMD POWER INDUCTORS CDF3340 SERIES

外型及尺寸 (单位: mm) Shape and size (unit: mm)

Anruike/安瑞科

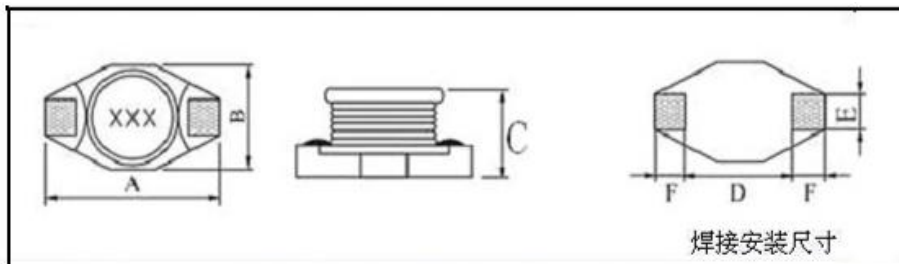

产品型号	A (Max)	B (Max)	C (Max)	D	E	F	载带盘装
CDF3340	12.95	9.40	11.43	7.62	2.54	2.45	400PCS/R

电气参数:Electrical parameters:

Anruike/安瑞科

产品型号	电感量 (uH)	公差 (%)	测试频率	直流电阻 RDC (Ω) (Max)	额定电流 IDC (A) (Max)
CDF3340-3R3N	3.3	± 30	100KHz/0.25V	0.04	10.5
CDF3340-100M	10	± 20	100KHz/0.25V	0.03	10.0
CDF3340-120M	12	± 20	100KHz/0.25V	0.04	9.7
CDF3340-150M	15	± 20	100KHz/0.25V	0.05	9.5
CDF3340-180M	18	± 20	100KHz/0.25V	0.06	9.3
CDF3340-220M	22	± 20	100KHz/0.25V	0.07	9.2
CDF3340-270M	27	± 20	100KHz/0.25V	0.08	9.1
CDF3340-330M	33	± 20	100KHz/0.25V	0.085	8.5
CDF3340-390M	39	± 20	100KHz/0.25V	0.10	7.45
CDF3340-470M	47	± 20	100KHz/0.25V	0.11	7.30
CDF3340-560M	56	± 20	100KHz/0.25V	0.18	5.80
CDF3340-680M	68	± 20	100KHz/0.25V	0.23	5.68
CDF3340-820M	82	± 20	100KHz/0.25V	0.25	4.53
CDF3340-101K	100	± 10	100KHz/0.25V	0.26	4.39
CDF3340-121K	120	± 10	100KHz/0.25V	0.29	4.31
CDF3340-151K	150	± 10	100KHz/0.25V	0.35	4.26
CDF3340-181K	180	± 10	100KHz/0.25V	0.46	4.20
CDF3340-221K	220	± 10	100KHz/0.25V	0.49	4.13
CDF3340-271K	270	± 10	100KHz/0.25V	0.68	4.10
CDF3340-331K	330	± 10	100KHz/0.25V	0.86	4.02
CDF3340-391K	390	± 10	100KHz/0.25V	0.94	3.90
CDF3340-471K	470	± 10	100KHz/0.25V	1.25	3.84
CDF3340-561K	560	± 10	100KHz/0.25V	1.30	3.82
CDF3340-681K	680	± 10	100KHz/0.25V	1.44	3.80
CDF3340-821K	820	± 10	100KHz/0.25V	1.58	3.78
CDF3340-102K	1000	± 10	100KHz/0.25V	1.70	3.76

以上参数仅供参考,精准参数以样品为准。本页面未能全部录入,需更多参数或特殊要求请联系我司

深圳市安瑞科电子有限公司 优质功率电感专业生产商... Tel: 0755-29805463 27994543 FAX: 0755-29805221

网址: <http://www.anruike.com> E-mail: anruike@anruike.com QQ:1193940818