

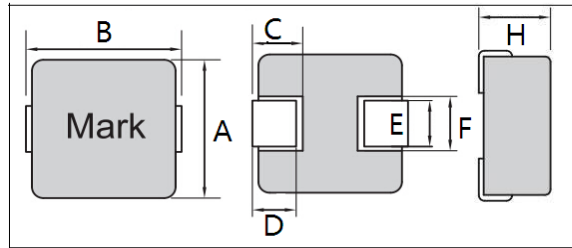


Anruike/安瑞科 车规级电感 ASDC 系列 (采用不锈钢粉压铸)

外型及尺寸 Shape and size (unit: mm)

Anruike/安瑞科 www.anruike.com Tel:0755-29805463



| 产品型号 | A | B (Max) | H (Max) | C | D | E | F | N | J | G | unit package |
|----------|-----|---------|---------|-----|-----|-----|-----|-----|-----|-----|-----------------|
| ASDC0730 | 6.6 | 7.2 | 5.0 | 2.0 | 1.6 | 3.0 | 3.6 | 8.4 | 3.7 | 3.5 | 500PCS/R |

电气参数 Electrical parameters

Anruike/安瑞科 www.anruike.com Tel: 0755-29805463

| 产品型号 Part NO | 电感量 Inductance L (uH) ±20% | 测试条件 Test Condition | 直流电阻 (mΩ) DC Resistance | | 温升电流 Heat Rated Current (A)Max | 饱和电流 Saturation Current (A) (Max) |
|-----------------|----------------------------------|------------------------|----------------------------|-----|---|--|
| | | | Typical | Max | | |
| ASDC0750-R36M | 0.36 | 100KHz/1.0V | 3.2 | 3.5 | 21 | 25 |
| ASDC0750-R56M | 0.56 | 100KHz/1.0V | 3.4 | 3.6 | 20 | 18 |
| ASDC0750-R68M | 0.68 | 100KHz/1.0V | 3.9 | 4.2 | 18 | 17 |
| ASDC0750-R82M | 0.82 | 100KHz/1.0V | 4.6 | 4.9 | 16.5 | 16 |
| ASDC0750-1R0M | 1.0 | 100KHz/1.0V | 6.5 | 8.5 | 10 | 16 |
| ASDC0750-1R5M | 1.5 | 100KHz/1.0V | 8.5 | 12 | 8 | 14 |
| ASDC0750-2R2M | 2.2 | 100KHz/1.0V | 11 | 14 | 7 | 12 |
| ASDC0750-3R3M | 3.3 | 100KHz/1.0V | 18 | 22 | 6.5 | 11 |
| ASDC0750-4R7M | 4.7 | 100KHz/1.0V | 22 | 30 | 6 | 10 |
| ASDC0750-6R8M | 6.8 | 100KHz/1.0V | 33 | 45 | 4.5 | 9 |
| ASDC0750-220M | 22 | 100KHz/1.0V | 108 | 140 | 2.2 | 4 |
| ASDC0750-330M | 33 | 100KHz/1.0V | 160 | 210 | 2 | 4 |
| ASDC0750-470M | 47 | 100KHz/1.0V | 192 | 247 | 2 | 3 |

本页面未能录入全部或最新的参数, 仅供参考, 请您在订购前向本公司索要精准参数及样品。

Reference for this page failed to input all or most new parameters, please ask for the precision parameter and sample to the company before the order.

* K 表示电感值的公差为±10%, M 表示电感值的公差为±20%, N 表示电感值的公差为±30%。

K said inductance tolerance is ±10%, M said inductance tolerance is ± 20%, N said inductance tolerance is ±30%.

深圳市安瑞科电子有限公司/優質電感專業製造商.....Tel:0755-29805463,27994543 Fax:0755-29805221

<http://www.anruike.com> E-mail: ark@anruike.com